



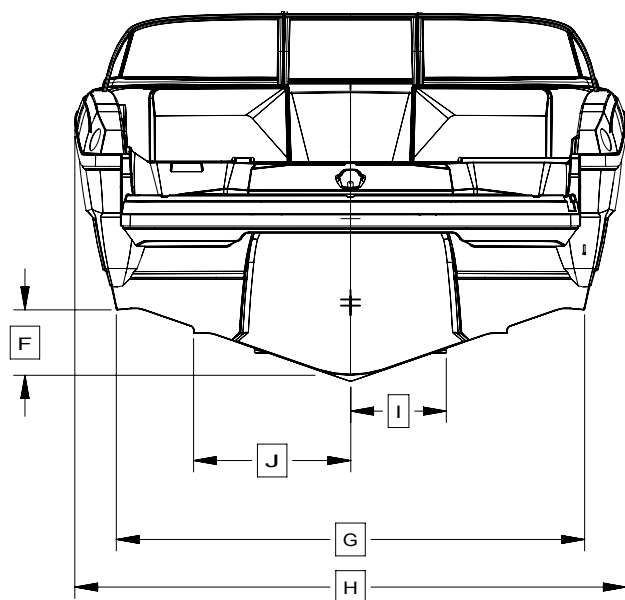

A	1'-7 ¹ / ₂ " (0.50M)	BOW EYE TO FWD GUNNEL W/RUB-RAIL
B	2'-5 ³ / ₄ " (0.76M)	BOW EYE TO KEEL
C	2'-0" (0.61M)	STERN EYE TO KEEL
D	17'-11 ⁵ / ₈ " (5.48M)	AFT KEEL POINT TO BOW EYE
E	23' 0" (7.01M)	MOLDED SWIM PLATFORM TO FWD GUNNEL W/RUB-RAIL AT CENTERLINE
F	1' 0" (0.30M)	CHINE TO KEEL (LOWEST POINT WHEN BOAT IS LEVEL)
G	7' 0" (2.13M)	CHINE TO CHINE
H	8' 6" (2.59M)	BEAM W/RUB-RAIL
I	1' 5 ¹ / ₂ " (0.44M)	KEEL TO INBOARD STRAKE
J	2' 4 ⁵ / ₈ " (0.73M)	KEEL TO OUTBOARD STRAKE

20°	DEADRISE
3,950 lbs./1,792 kg	DRY WEIGHT OF STANDARD BOAT
4,360 lbs./1,978 kg	MAX TRAILERING WEIGHT OF BOAT WITH HEAVIEST ENGINE, FULL FUEL & FULL WATER (NOT INCLUDING GEAR)

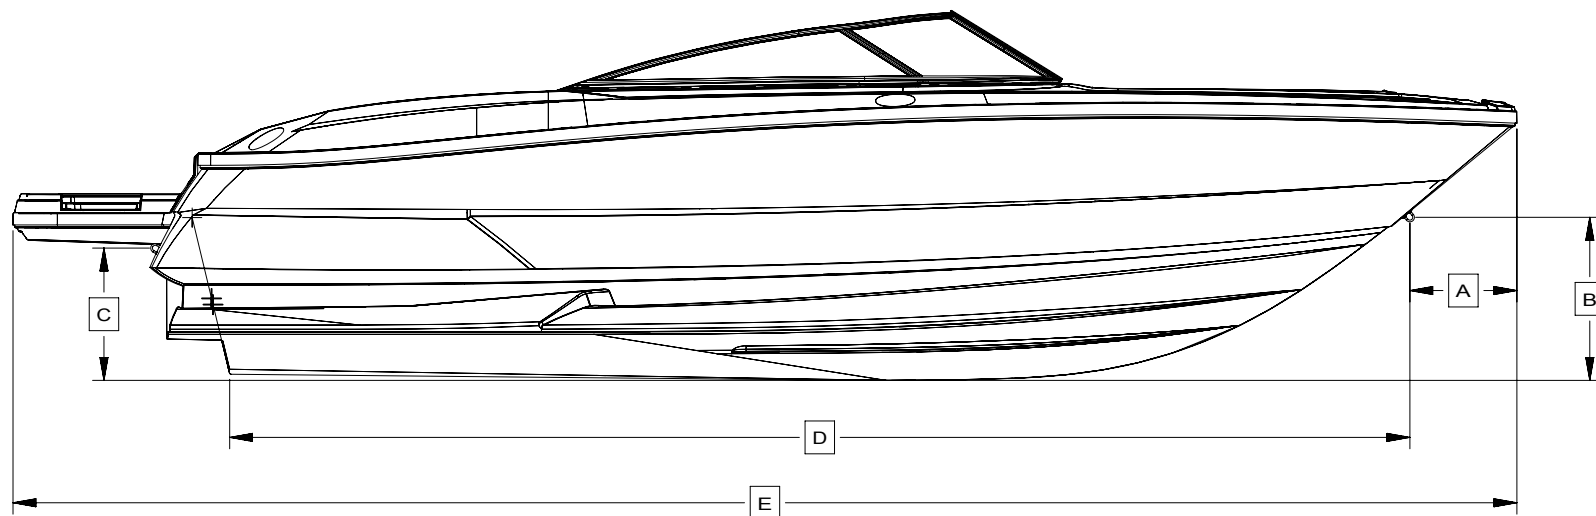

MK
234 SS

TITLE: TRAILER Q.C. DIMENSIONS			
DRAWING NUMBER: 1024-002-025	SHEET: 1 OF 1	SCALE: N.T.S.	
DRAWN BY: TLH	DATE: 06/08/12	CHECKED BY	DATE:
APPROVED BY		DATE:	