


REV:

DATE:


DESCRIPTION:

BY:

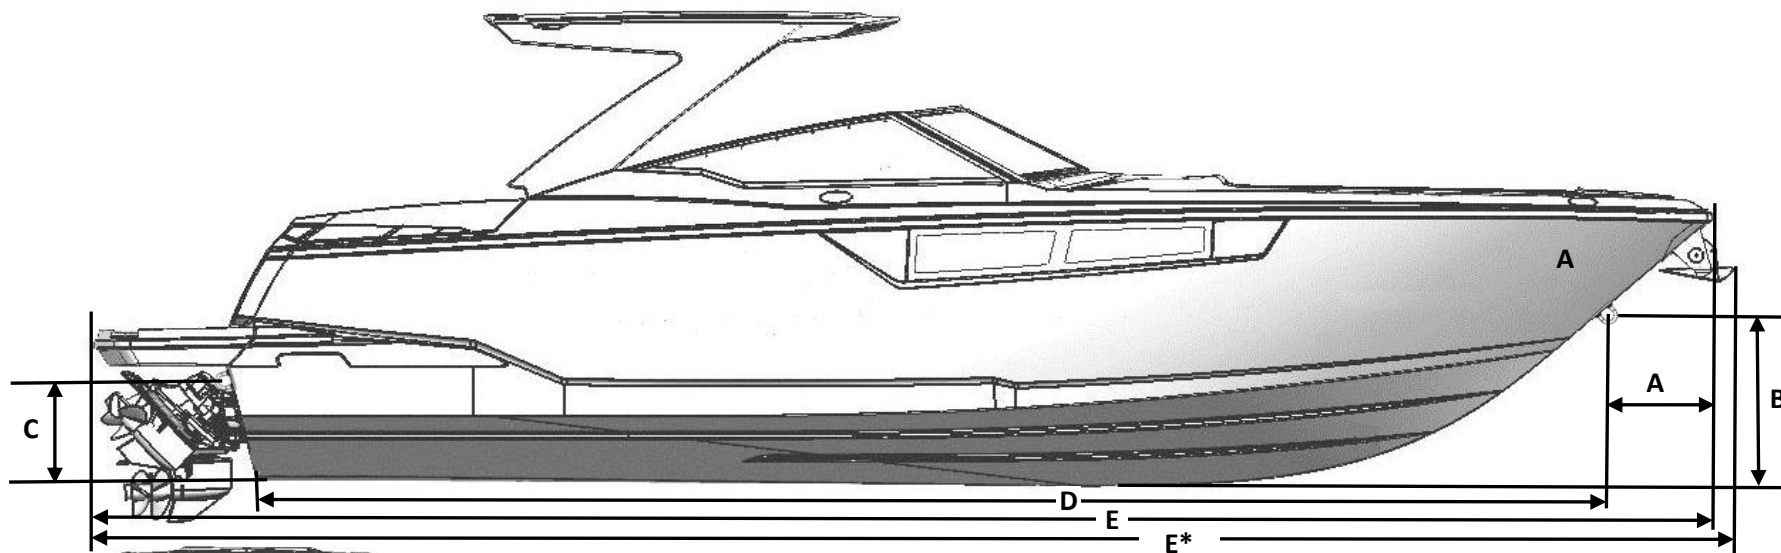

A	2'-4 1/2"	(0.72M)	BOW EYE TO GUNNEL W/ RUBRAIL
B	4'-6"	(1.39M)	BOW EYE TO KEEL
C	2'-6 1/4"	(0.77M)	STERN EYE TO KEEL
D	31'-3 1/2"	(9.54M)	AFT KEEL POINT TO BOW EYE
E	37'-0"	(11.30M)	SWIM PLATFORM TO FWD GUNNEL W/ RUBRAIL AT CENTERLINE
E*	37'-5 1/2"	(11.41M)	SWIM PLATFORM W/ RUBRAIL TO ANCHOR AT CENTERLINE
F	1'-7 3/4"	(0.50M)	CHINE TO KEEL (LOWEST POINT WHEN BOAT IS LEVEL)
G	9'-5 1/2"	(2.88M)	CHINE TO CHINE
H	11'-0"	(3.35M)	BEAM W/ RUBRAIL
I	1'-11"	(0.58M)	KEEL TO INBOARD STRAKE
J	3'-4"	(1.02M)	KEEL TO OUTBOARD STRAKE

	21°	DEADRISE
16,000 lbs.	7257 kg.	DRY WEIGHT OF STANDARD BOAT
17,500 lbs.	7938 kg.	MAX TRAILERING WEIGHT OF BOAT WITH HEAVIEST ENGINE, FULL FUEL, & FULL WATER (NOT INCLUDING GEAR)

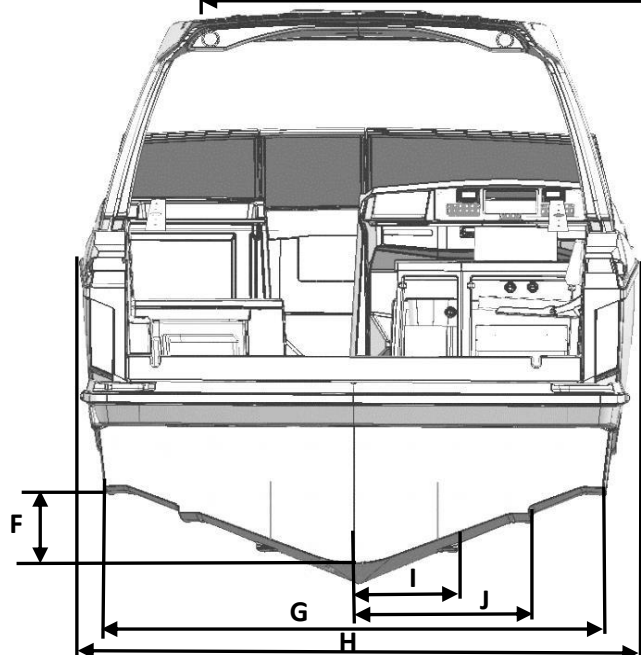

**CN
378SE**

TITLE:

TRAILER Q.C. DIMENSIONS

DRAWING NUMBER:

1038-002-25

SHEET:

1 OF 1

SCALE:

N.T.S.

DRAWN BY:

DATE:

JVH

09/02/20

CHECKED BY:

DATE:

APPROVED BY:

DATE:

Approved 09/02/20