

REV:

DATE:

DESCRIPTION:



A

10/3/2019

REPLACED ARCH WITH MANUAL FOLDING TOWER, ADDED ELECTRIC TOWER DIMENSIONS

BY:

JVH

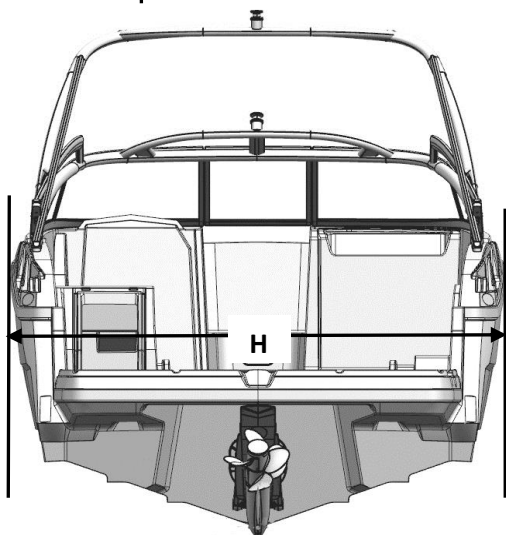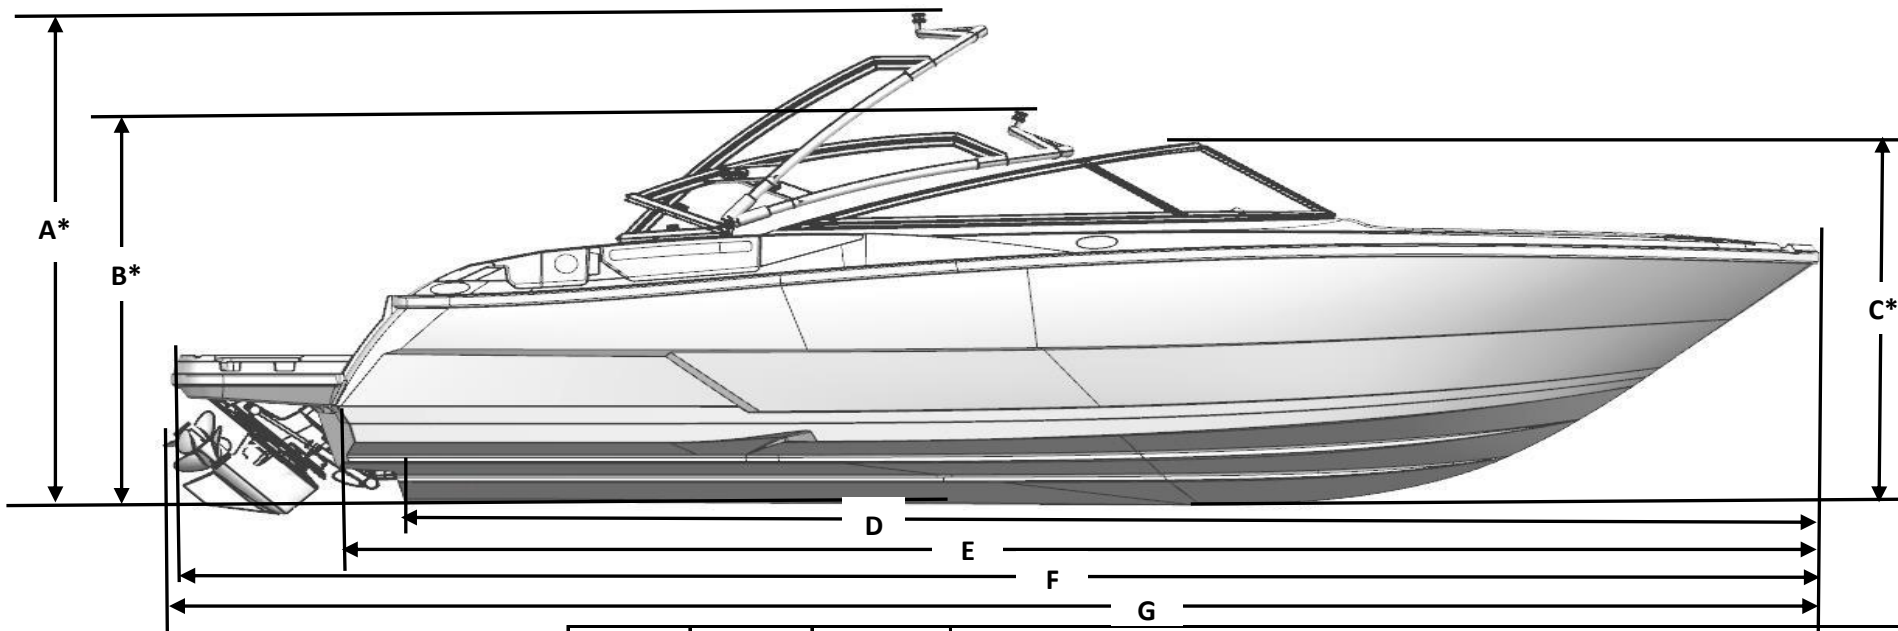

A	9'-1"	(2.77M)	TOP OF WAKEBOARD TOWER TO KEEL, UPRIGHT POSITION
A*	8'-11"	(2.72M)	TOP OF ELECTRIC TOWER TO KEEL, UPRIGHT POSITION
B	7'-3"	(2.21M)	TOP OF WAKEBOARD TOWER TO KEEL, ROTATED DOWN POSITION
B*	8'-1"	(2.46M)	TOP OF ELECTRIC TOWER TO KEEL, ROTATED DOWN POSITION
B*	7'-11"	(2.41M)	TOP OF WAKEBOARD TOWER ROTATED DOWN TO BASE OF SHIPPING CRADLE (SHIPPING HEIGHT)
B*	8'-9"	(2.67M)	TOP OF ELECTRIC TOWER ROTATED DOWN TO BASE OF SHIPPING CRADLE (SHIPPING HEIGHT)
C	6'-8"	(2.03M)	TOP OF WINDSHIELD TO KEEL
C*	7'-3"	(2.21M)	TOP OF WINDSHIELD TO BASE OF SHIPPING CRADLE (SHIPPING HEIGHT)
D	21'-7"	(6.58M)	AFT KEEL POINT TO FWD DECK GUNNEL W/ RUBRAIL AT CENTERLINE
E	23'-0"	(7.01M)	AFT HULL POINT W/ NO PLATFORM TO FWD DECK GUNNEL W/ RUBRAIL AT CENTERLINE
F	25'-1"	(7.65M)	MOLDED SWIM PLATFORM TO FWD DECK GUNNEL W/ RUBRAIL
G	25'-3"	(7.70M)	OUTDRIVE UP W/PROP TO FWD GUNNEL W/ RUBRAIL (SHIPPING LENGTH)
H	8'-6"	(2.59M)	BEAM W/ RUBRAIL (SHIPPING WIDTH)

5,100 lbs.

2,313 kg.

DRY WEIGHT OF STANDARD BOAT



MT
258SS

TITLE:

SHIPPING Q.C. DIMENSIONS

DRAWING NUMBER:

1037-002-30

SHEET:

1 OF 1

SCALE: N.T.S.

DRAWN BY:

DATE:

TLH

04/09/15

CHECKED BY:

DATE:

APPROVED BY:

DATE:

Approved 10/9/19