



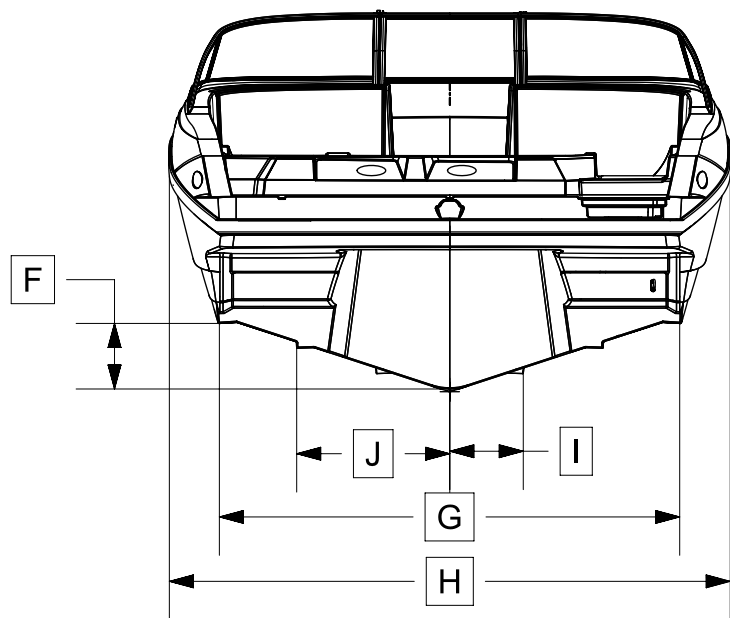

A	1' 6" (0.46M)	BOW EYE TO FWD GUNNEL W/RUB-RAIL
B	2' 13/4" (0.65M)	BOW EYE TO KEEL
C	1' 6 1/2" (0.47M)	STERN EYE TO KEEL
D	15' 11 1/4" (4.86M)	AFT KEEL POINT TO BOW EYE
E	19' 10" (6.0M)	MOLDED SWIM PLATFORM TO FWD GUNNEL W/RUB-RAIL AT CENTERLINE
F	0' 11 3/8" (0.29M)	CHINE TO KEEL (LOWEST POINT WHEN BOAT IS LEVEL)
G	6' 8 3/8" (2.04M)	CHINE TO CHINE
H	8' 4" (2.54M)	BEAM W/RUB-RAIL
I	1' 0 3/4" (0.32M)	KEEL TO INBOARD STRAKE
J	2' 2 5/8" (0.68M)	KEEL TO OUTBOARD STRAKE

20°	DEADRISE
3400 lbs./1542 kg.	DRY WEIGHT OF STANDARD BOAT
3650 lbs./1656 kg.	MAX TRAILERING WEIGHT OF BOAT WITH HEAVIEST ENGINE, FULL FUEL <i>NOT INCLUDING GEAR</i>

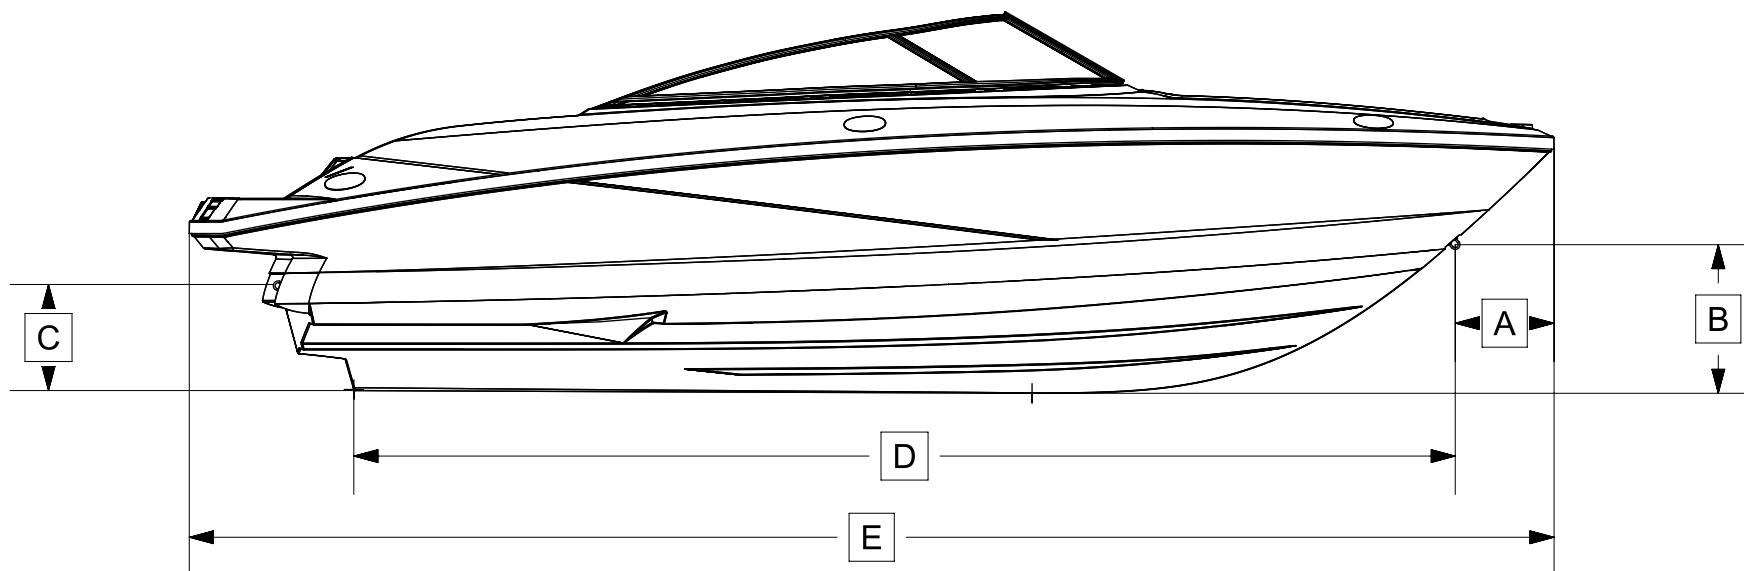

**FA
M19**

TITLE: TRAILER Q.C. DIMENSIONS			
DRAWING NUMBER: 1054-002-025	SHEET: 1 OF 1	SCALE: N.T.S.	
DRAWN BY: TLH	DATE: 8/25/17	CHECKED BY:	DATE: Approved 8/31/17