
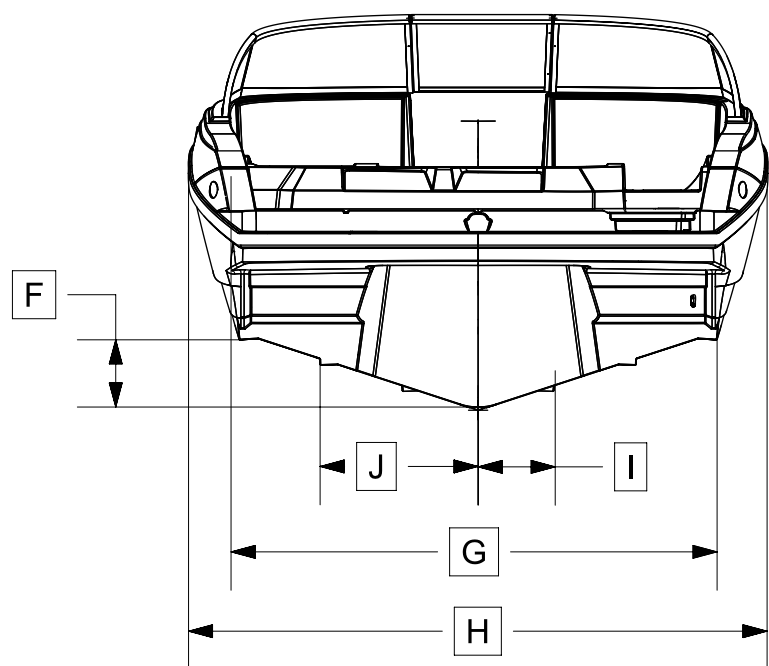


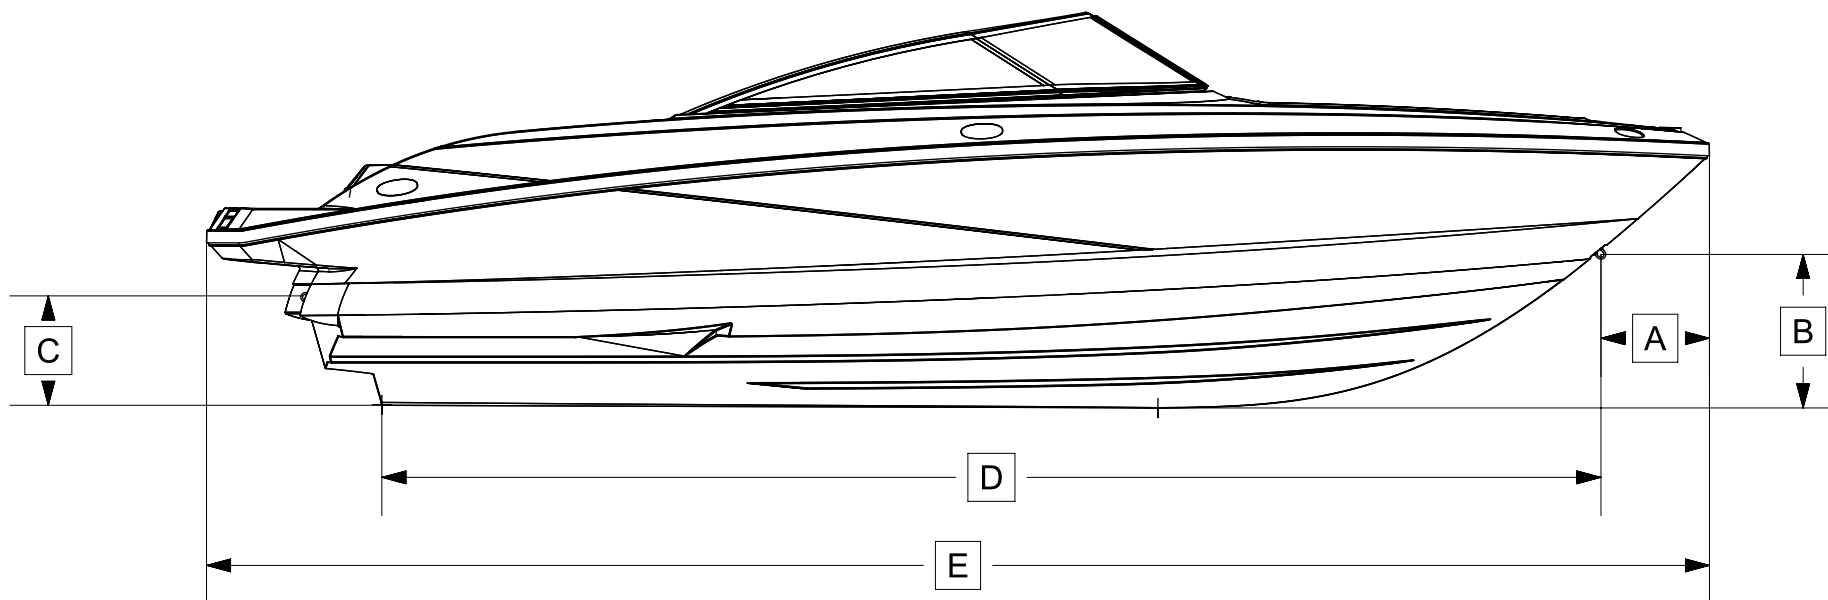

A	1' 7 1/2" (0.50M)	BOW EYE TO FWD GUNNEL W/RUB-RAIL
B	2' 23/4" (0.68M)	BOW EYE TO KEEL
C	1' 7" (0.48M)	STERN EYE TO KEEL
D	17' 73/4" (5.38M)	AFT KEEL POINT TO BOW EYE
E	21' 10" (6.65M)	MOLDED SWIM PLATFORM TO FWD GUNNEL W/RUB-RAIL AT CENTERLINE
F	0' 113/4" (0.30M)	CHINE TO KEEL (LOWEST POINT WHEN BOAT IS LEVEL)
G	7' 0 1/2" (2.15M)	CHINE TO CHINE
H	8' 6" (2.59M)	BEAM W/RUB-RAIL
I	1' 1 1/2" (0.34M)	KEEL TO INBOARD STRAKE
J	2' 3 1/2" (0.69M)	KEEL TO OUTBOARD STRAKE

20°	DEADRISE
3750 lbs./1710 kg.	DRY WEIGHT OF STANDARD BOAT
4100 lbs./1860 kg.	MAX TRAILERING WEIGHT OF BOAT WITH HEAVIEST ENGINE, FULL FUEL <i>NOT INCLUDING GEAR!</i>