
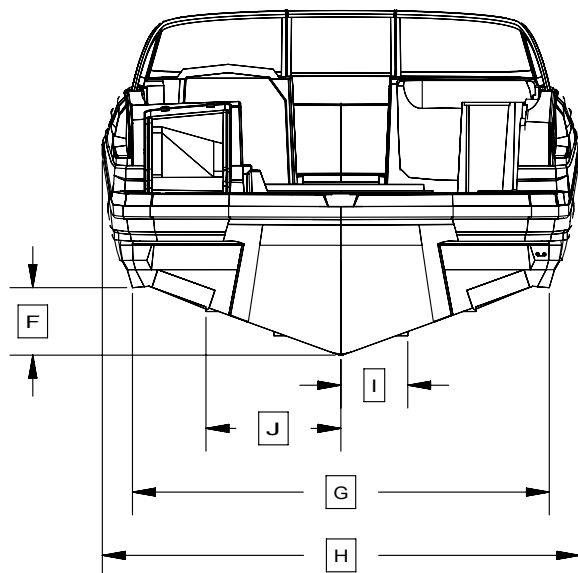


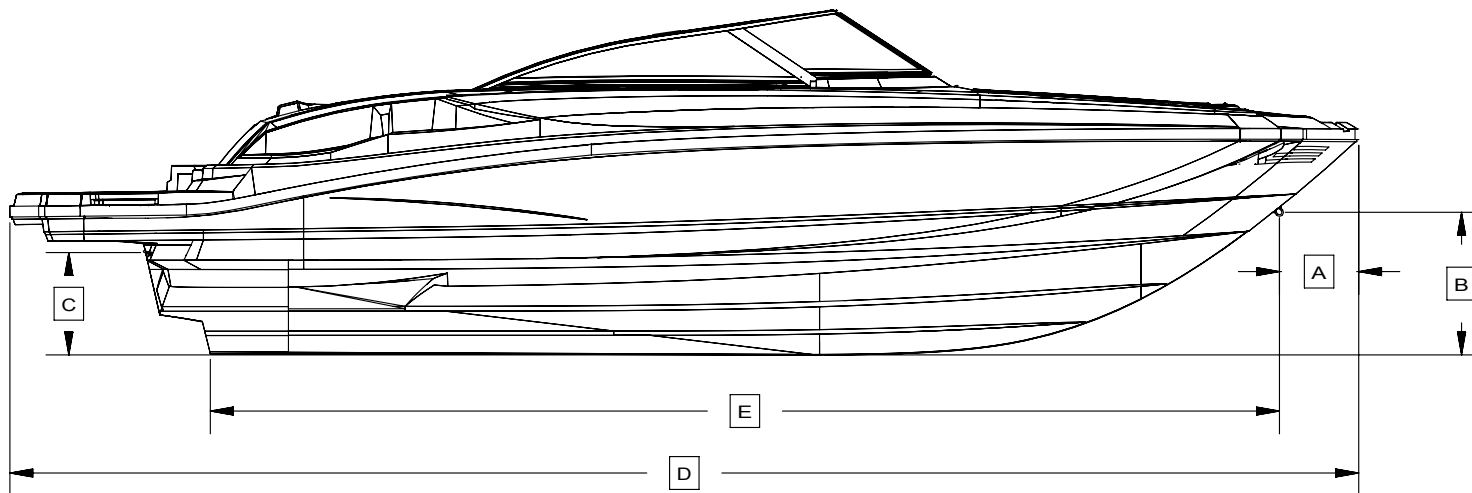

A	1'-5 ³ / ₈ " (0.44M)	BOW EYE TO FWD GUNNEL W/RUB-RAIL
B	2'-6" (0.76M)	BOW EYE TO KEEL
C	1'-9 ¹ / ₂ " (0.55M)	STERN EYE TO KEEL
D	23'-10" (7.26M)	MOLDED SWIM PLATFORM TO FWD GUNNEL W/RUB-RAIL AT CENTERLINE
E	18'-9 ³ / ₈ " (5.72M)	TRANSOM/KEEL INTERSECTION TO BOW EYE
F	1'-2 ¹ / ₄ " (0.36M)	CHINE TO KEEL (LOWEST POINT WHEN BOAT IS LEVEL)
G	7'-4" (2.24M)	CHINE TO CHINE
H	8'-6" (2.50M)	BEAM W/RUB-RAIL
I	1'-2 ¹ / ₈ " (0.36M)	KEEL TO INBOARD STRAKE
J	2'-4 ¹ / ₂ " (0.72M)	KEEL TO OUTBOARD STRAKE

20°	DEADRISE
4500 lbs/2041 kg	DRY WEIGHT OF STANDARD BOAT
5100 lbs/2223 kg	MAX TRAILERING WEIGHT OF BOAT WITH HEAVIEST ENGINE, FULL FUEL & FULL WATER (NOT INCLUDING GEAR)